

Pyro S Firmware Update Manual

Pyro S release note

Release date	Firmware version	Updates	Firmware download
20240419	Pyro_S_H100_V1.0.1.6	Initial version	https://download-hollyland.oss-us-east-1.aliyuncs.com/Firmware/Video_transmissions/Pyro_S/V9831_H100_V1.0.1.6.zip
20240712	Pyro_S-V1.0.1.6_Interim Version	Interim Version If the version is below 1.0.2.0, please update this version first	https://download-hollyland.oss-us-east-1.aliyuncs.com/Firmware/Video_transmissions/Pyro_S/Pyro_S-V1.0.1.6_Interim%20Version.rar
20240712	Pyro_S_H100_allversion_V1.0.3.2	Fixed known issues If the version is above 1.0.2.0, then you could upgrade directly, else you need upgrade Interim version firstly	https://download-hollyland.oss-us-east-1.aliyuncs.com/Firmware/Video_transmissions/Pyro_S/Pyro_S_H100_allversion_V1.0.3.2.zip

Attentions


- Make sure the device have enough power when updating, pls don't unplug the USB disk before the update process is completed and successful.
- The device will change to default settings automatically after updated.
- **The firmware updating takes the risks to cause unknown error, pls do not upgrade the device when you using it on-site.**

How to check the device's firmware version

Long press the middle button to enter the menu page, select the system---version info to check the firmware version.

Operations to update the Pyro H firmware version

1. Prepare a USB flash disk with Type-C connector and storage less than 32GB, format the USB disk to FAT32.

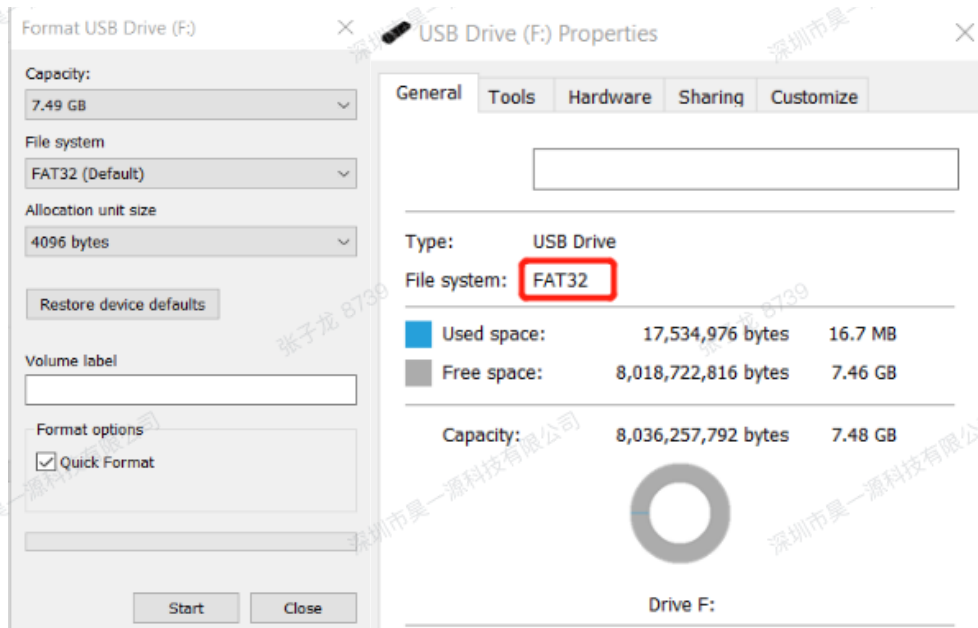

2. Download the firmware to USB flash disk and make sure it is under the root directory, pls don't put it inside of any folder.
3. Connect the USB disk to Pyro S via type-C port, it will recognize the USB disk automatically and start to updating

If update failed after tried several times, you can contact our technical support team from Hollyland for help: support@hollyland.com